


产品/Product: **IPX Mounting G1 ,SMD RF Connector**

料号/PN: **AHCG.204**

应用/Application: **All RF transmit /receiver communication system ; ~6GHz**

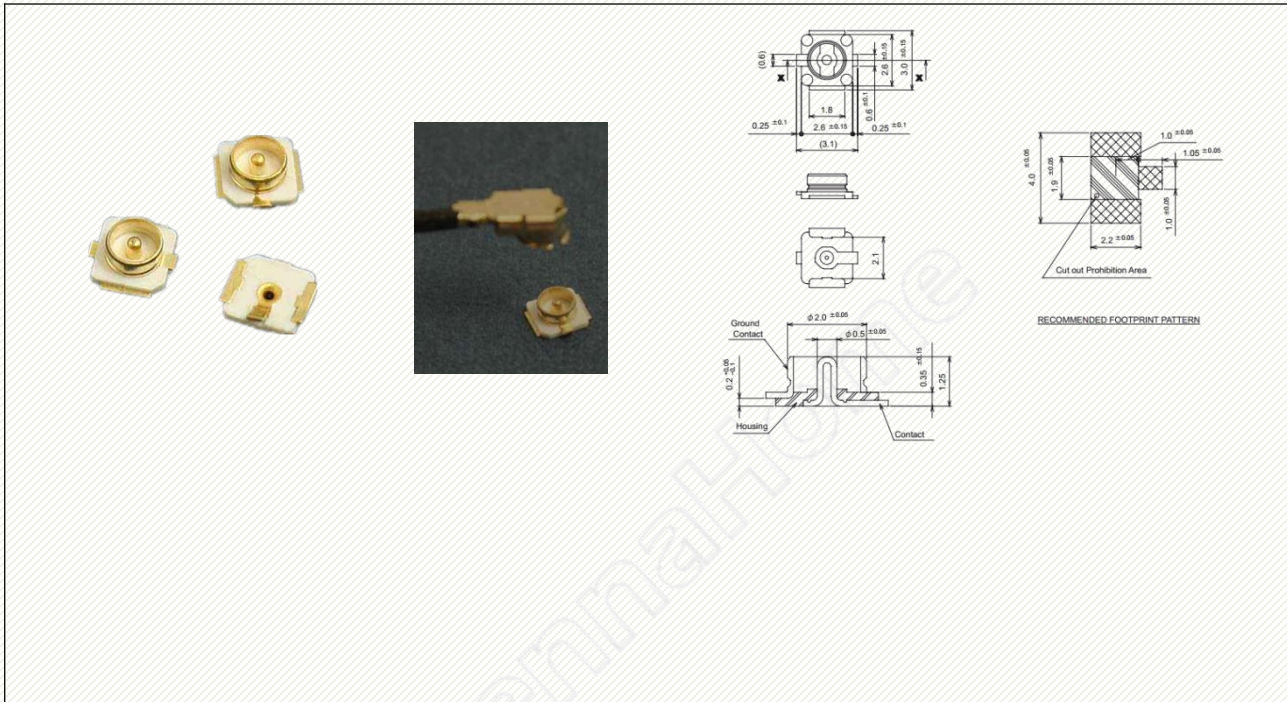

电气参数 (Electrical Properties)

频率/Frequency:	DC~6000 MHz
输入阻抗/Impedance:	50 Ω
驻波比/VSWR:	≤1.3
插入损耗/Insertion Loss:	0.15 dB
极化方式/Polarization:	/

机械参数 (Mechanical Properties)

接头&线缆/Conn&Cable:	IPX G1
材料&颜色/Material&Color:	Copper
安装方式/Mounting:	SMD
尺寸/Size:	Q2.6 x 1.25 mm
重量/Weight:	0.02 g/pcs
工作温度/Operate Temp:	-40 ~ +85 °C

关联产品/Relation Product



SMA-K DIP ([AHCG.202](#))



SMA-K ASSY ([AHCG.101](#))



SMA/B-IPX ([AHCG.102](#))





SMA-K Q4 DIP ([AHCG.201](#))

产品手册/ Product Catalogue



免费样品申请
Ask free sample

下载地址/Download Link: <http://docs.AntennaHome.com/ant/catalogue.pdf>

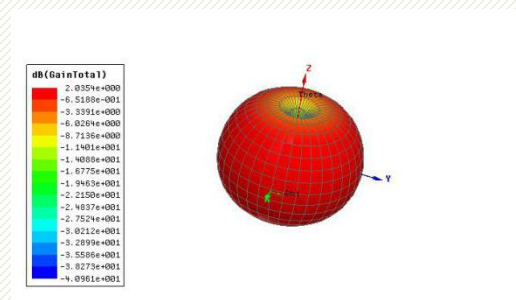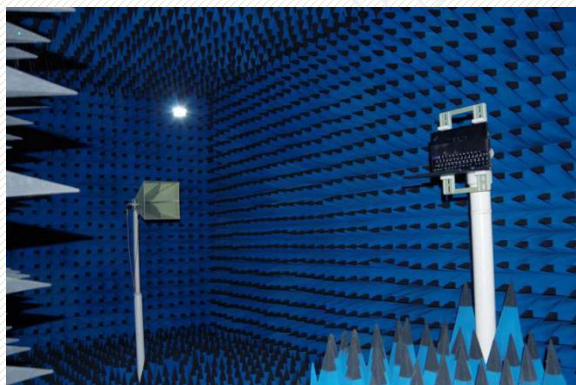

Online Support

Contact Us

E-mail : CS@AntennaHome.com

Website : [Http://www.AntennaHome.com](http://www.AntennaHome.com)