


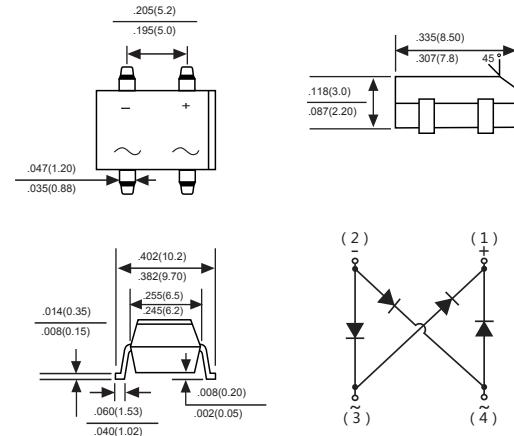

SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIERS

Features

- ◆ Ideal for printed circuit board
- ◆ Reliable low cost construction utilizing molded plastic technique
- ◆ High temperature soldering guaranteed: 260°/10 seconds at 5 lbs., (2.3kg) tension
- ◆ Small size, simple installation
- ◆ High surge current capability

Mechanical Data

Case : JEDEC DBS Molded plastic body

Terminals : Solder plated, solderable per MIL-STD-750, Method 2026

Polarity : Polarity symbol marking on case

Mounting Position : Any

Weight : 0.02 ounce, 0.4 grams

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	MDD DB201S	MDD DB202S	MDD DB203S	MDD DB204S	MDD DB205S	MDD DB206S	MDD DB207S	UNITS
Marking Code									
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at $T_C=40^\circ C$	$I_{F(AV)}$								A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}								A
Maximum instantaneous forward voltage drop per leg at 1A	V_F								V
Maximum DC reverse current $T_A=25^\circ C$ at rated DC blocking voltage $T_A=100^\circ C$	I_R								μA
Operating temperature range	T_J								$^\circ C$
storage temperature range	T_{STG}								$^\circ C$

NOTES:DBS for surface mount package.



Ratings And Characteristic Curves

Fig. 1 Derating Curve for Output Rectified Current


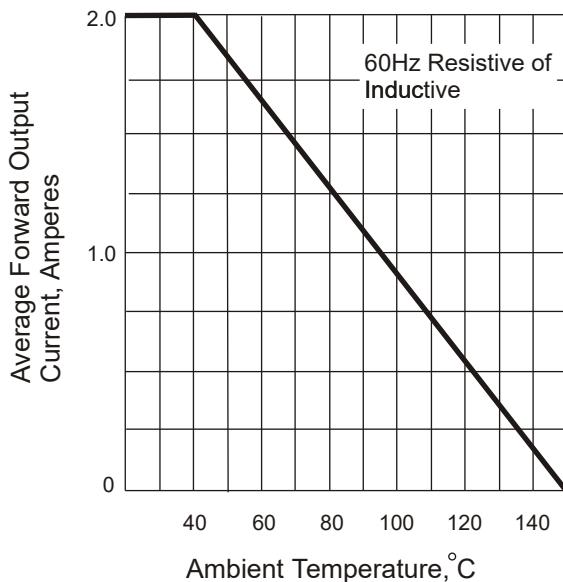


Fig. 3 Typical Instantaneous Forward Characteristics

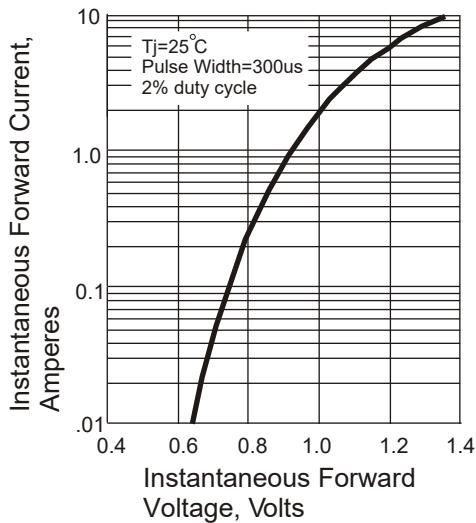

The curve above is for reference only.

Fig. 2 Maximum Non-repetitive Peak Forward Surge Current

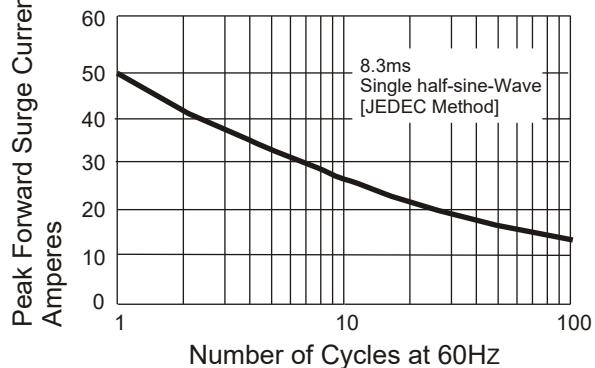


Fig. 4 Typical Revers Characteristics

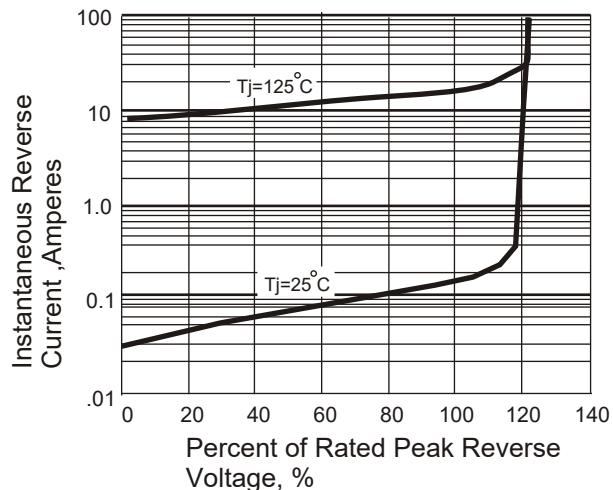


Fig. 5 Typical Junction Capacitance

